


AluCon®: The best for non-ferrous metals

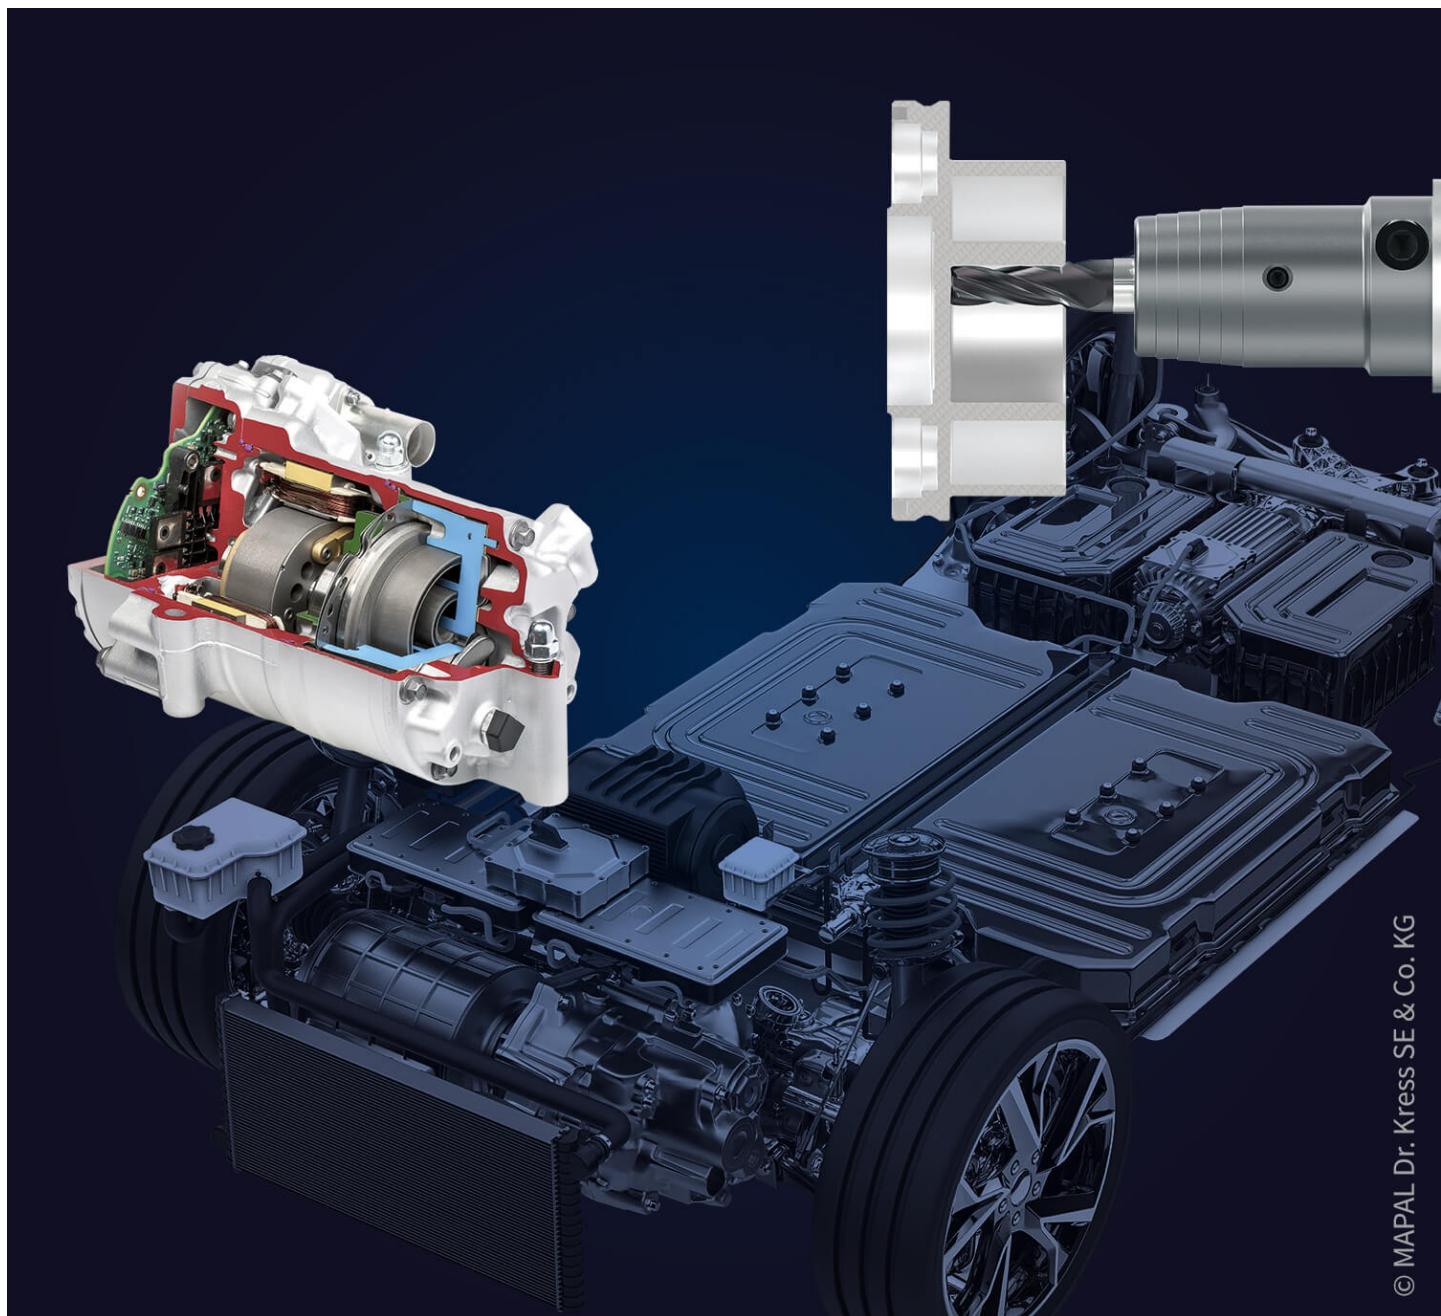


© MAPAL Dr. Kress SE & Co. KG

AluCon® opens up new potential in the machining of aluminum alloys for e-mobility (Image © MAPAL Dr. Kress SE & Co. KG)

HiPIMS ensures better performance

Whether for e-mobility or in aircraft construction – lightweight materials such as aluminum and titanium-aluminum alloys are increasingly being used to reduce weight. These high-performance materials pose special challenges for machinists, which they can only meet with precisely matched high-end tools. The TiB₂-based HiPIMS coating material AluCon® – the further development of the successful coating material AluSpeed® – enables such innovative tool concepts.

Like the well-proven coating material AluSpeed®, AluCon® is based on TiB₂. The low affinity to non-ferrous metals and the high hardness make the coating materials so successful in the machining of aluminum, copper and titanium. The big difference: AluSpeed® is produced using the traditional sputtering process, while AluCon® is produced with HiPIMS, the further development of sputtering. This enhances the outstanding physical properties even further. AluCon® thus combines the advantages of AluSpeed® with the layer adhesion, density and hardness of the HiPIMS process.

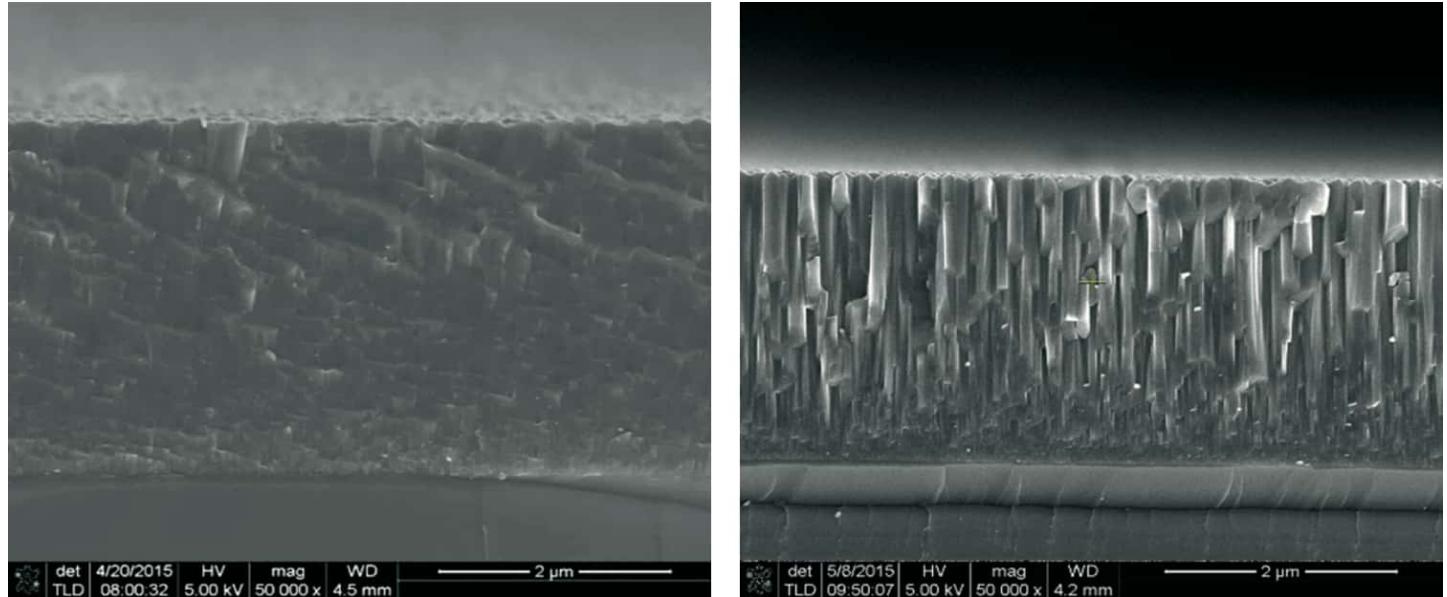

The comparison of the SEM images makes it very clear: thanks to the production in the HiPIMS process, AluCon® (right) has a much finer structure than AluSpeed® (left) and thus improved coating properties

Thanks to the coating thickness of 2 μm and its fine crystal structure, AluCon® is particularly suitable for aluminum machining with sharp cutting edges. The HiPIMS coating material provides excellent protection against built-up edges. The extremely smooth coating surface ensures optimum chip removal. The diminished friction lowers the temperature in the cutting process. The dense, closed layer structure also successfully reduces diffusion and thus wear at high operating temperatures. This results in significantly longer tool life. The very good adhesion coupled with the high hardness of 5,000 HV_{0.05} and better ductility enables top performance in wet and dry machining – and that with increased cutting data. Thus, tools with an AluCon® coating achieve top performance when machining aluminum, copper and titanium.

“AluSpeed® has been the reference in terms of machining aluminum and non-ferrous metals for the past two decades. Since we introduced the HiPIMS coating material AluCon® to the market five years ago, numerous applications have shown that it can be even better. In all machining results, AluCon® achieves at least as good and in most cases even significantly better results than AluSpeed®. This proves once again: HiPIMS is the future of PVD coating. That is why we have decided to produce only the ‘upgrade’. Thus AluCon® will now completely replace AluSpeed® at the end of the year,” says Inka Harrand, Product Manager Cutting Inserts at CemeCon.

AluCon®

Materials:

Aluminum, titanium, copper and other non-ferrous metals

Coating material:

TiB₂-based

Max. operating temperature:

1,000 °C

Color:

Silver

Coating thickness:

2 µm

Tool types:

Drills, milling cutters, reamers, threading tools and cutting inserts

AluCon®

Aircraft industry

AluCon®

Lightweight construction

AluSpeed®

Automotive industry

Aluminium

e-mobility

HiPIMS

surface quality

Cutting speed

hardness

Titanium aluminum alloys

Electric motor housing

Battery tray

Aluminium alloys

Hybrid vehicles

tolerances

productivity

abrasion resistance

low vibration machining

Dimensional accuracy